



DTI

Dragan Technologies Inc.

www.dticanada.com

ADJUSTABLE SAFETY PERIMETER EARLY ACCESS DETECTION

Operates in Dust, Dirt, and High-moisture Conditions.

360 Degree Detection with Multiple Units.



Detects Workers in Milliseconds



Features

- Detects worker within milliseconds.
- Resistant to: Dust, Smoke, Mist, Vibration, Infrared Radiation, Electrical Interference, and EMI.
- No False Detections.
- No Optics to clean.
- Not affected by color (including translucent or transparent objects).

Specs:

Operating Voltage	24V/DC
Alert Lights	Green (Detection Zone) Amber (Alert Zone) Red (Danger Zone)
PLC contact rating	200V/DC 1A (max)
Wireless System	CAN Output (RS232 supported on request)
Detection Distance	15 ft. (max) - 3 ft. (min)
Detection Beam Angle	40 deg wide



DTI

Dragan Technologies Inc.

For more information on DTI products visit our website or contact us below:
www.dticanada.com info@dticanada.com ph. 204 775 2445
41 Omands Creek Boulevard, Winnipeg, Manitoba, Canada R2R 2V2



DTI

Dragan Technologies Inc.




www.dticanada.com

DETECTION DISTANCE

3 - 15 ft (up to 4.6 m)

DETECTION BEAM ANGLE

16 - 40 deg wide

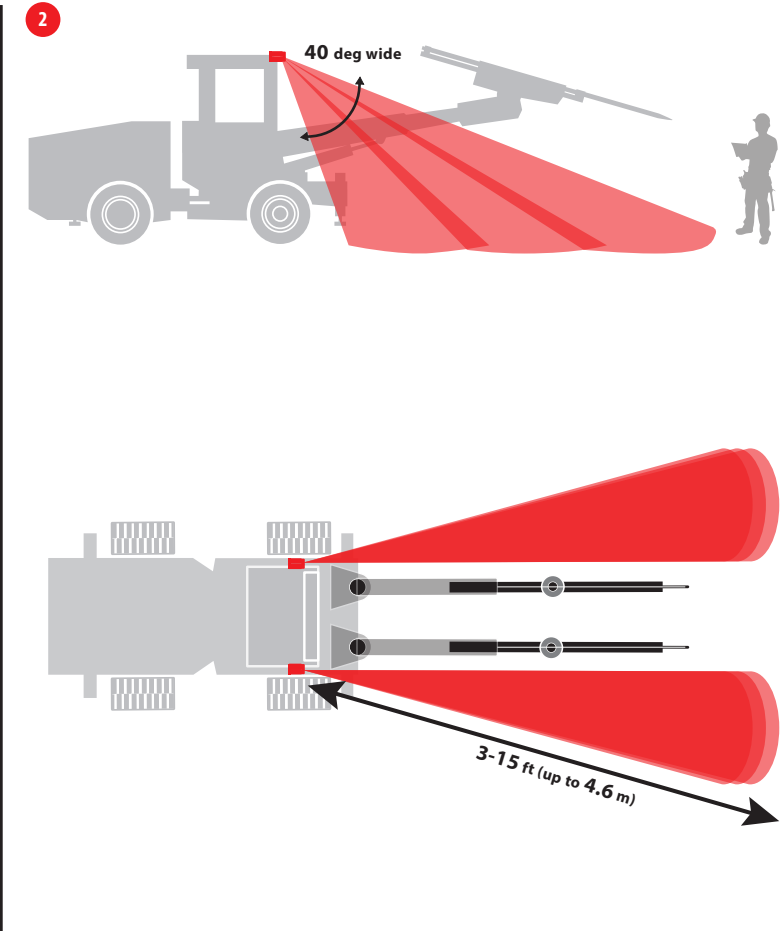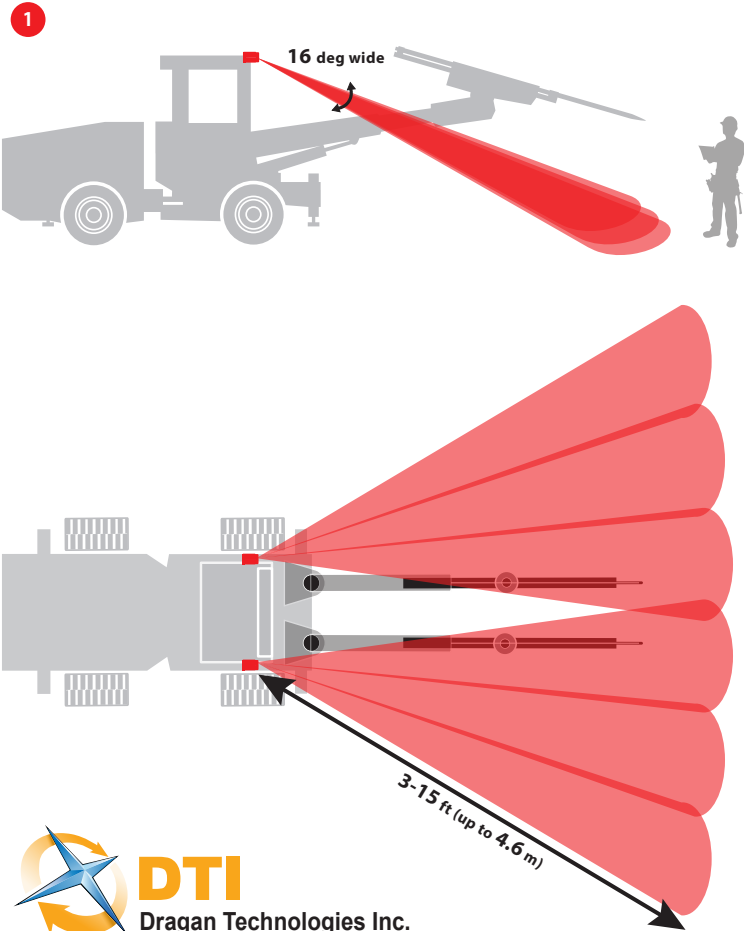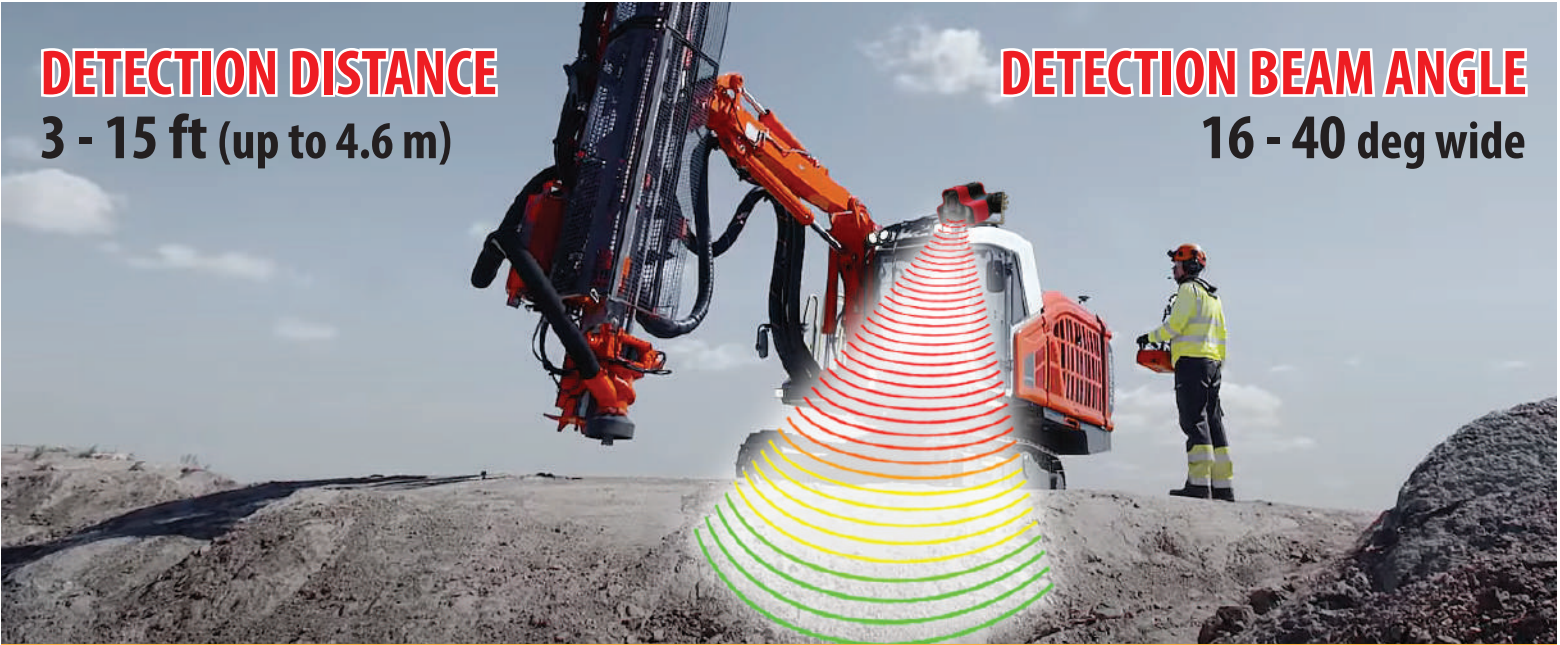

DTI

Dragan Technologies Inc.

For more information on DTI products visit our website or contact us below: 41 Omands Creek Boulevard, Winnipeg, Manitoba, Canada R2R 2V2

www.dticanada.com

info@dticanada.com

ph. 204 775 2445